



**PROVIDING COMPLETE  
FIRE FIGHTING SOLUTION**

**Distributors Fire Extinguisher Complete  
Range of Fire Fighting System & Equipments**



IS: 15683:2018



**PORTABLE FIRE EXTINGUISHER  
INDIAN STANDARD**

**Mob.: +91 8898181117 / +91 7506657023 / Email.: fireweb07@gmail.com**

**H.O - E/11, Shree Ganesh CHS, Gautam Nagar, behind Akruiti Centre Point, M.I, D.C, Andheri East, Mumbai, Maharashtra 400093**

**G-34 Shiv Shankar Society ,Gandhi Nagar , Lalji Pada, New Link Rd, Kandivali West, Mumbai, Maharashtra 400067**

## Dry Chemical Powder ABC Stored Pressure Fire Extinguisher Type


Monoammonium Phosphate based dry chemical powder suitable for 'A', 'B', & 'C' classes of fire involving materials like paper, wood, cotton, petrochemical products, Paints, resins, pigments, Varnish, gases in the compressed form like oxygen, acetylene, LPG & CNG

IS 15683:2018



CMIL NO: 7700044610

SUITABLE FOR CLASSES OF FIRE:

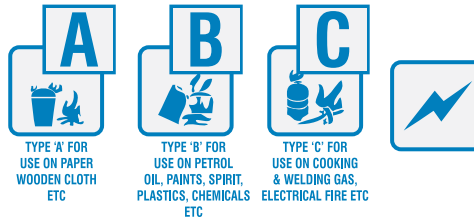

### DRY CHEMICAL POWDER ABC STORED PRESSURE TYPE

CAPACITY IN KG	1 KG	2 KG	4 KG	6 KG	9 KG
I.S. SPECIFICATION NO.	IS 15683:2018	IS 15683:2018	IS 15683:2018	IS 15683:2018	IS 15683:2018
FIRE RATING	(1A,21B)	(1A,21B)	(2A,55B)	(3A,89 B )	(4A,144 B)
OVERALL HEIGHT (MM)	320 MM	375 MM	460 MM	480 MM	585 MM
COMPLETE WEIGHT(APPR.KG)	02 KG	3.3 KG	6.2 KG	8.6 KG	12.5 KG
EMPTY WEIGHT(APPR.KG)	01 KG	1.3 KG	2.2 KG	2.6 KG	3.5 KG
MODEL NO.	ASP1	ASP2	ASP4	ASP6	ASP9
OPERATING TEMP. °C	(-)-20°C TO(+)+60°	(-)-20°C TO(+)+60°	(-)-20°C TO(+)+60°	(-)-20°C TO(+)+60°	(-)-20°C TO(+)+60°
DIA.OF CYLINDER(M M)	86± 10	108± 10	140±10	160±10	175±10
RANGE OF DISCHARGE(M)	2 MTR	2 MTR	2 MTR	2 MTR	2 MTR
DURATION OF DISCHARGE(SEC)	8 SEC	8 SEC	13 SEC	13 SEC	15 SEC
TEST PRESSURE(MIN)	35 kgf/cm <sup>2</sup>	35 kgf/cm <sup>2</sup>	35 kgf/cm <sup>2</sup>	35 kgf/cm <sup>2</sup>	35 kgf/cm <sup>2</sup>
WORKING PRESSURE	15 kgf/cm <sup>2</sup>	15 kgf/cm <sup>2</sup>	15 kgf/cm <sup>2</sup>	15 kgf/cm <sup>2</sup>	15 kgf/cm <sup>2</sup>
BRUST PRESSURE(MIN)	55 kgf/cm <sup>2</sup>	55 kgf/cm <sup>2</sup>	55 kgf/cm <sup>2</sup>	55 kgf/cm <sup>2</sup>	55 kgf/cm <sup>2</sup>
WELDED SECTION NOT TO BREAK AT LESS THAN 80 BAR					
APPROVALS	BIS	BIS	BIS	BIS	BIS

**Mob.: +91 8898181117 / +91 7506657023 / Email.: fireweb07@gmail.com**

H.O - E/11, Shree Ganesh CHS, Gautam Nagar, behindAkruti Centre Point, M.I, D.C, Andheri East, Mumbai, Maharashtra 400093

## DRY CHEMICAL POWDER BC SQUEEZE GRIP CARTRIDGE TYPE


Sodium bicarbonate based dry chemical powder suitable for 'B' & 'C' class of fire involving materials like petrochemical products, paints, resins, pigment, Varnish, gases in the compressed form like oxygen, acetylene, LPG & CNG

IS 15683:2018



CML NO: 7700044610

SUITABLE FOR CLASSES OF FIRE:



### DRY CHEMICAL POWDER BC SQUEEZE GRIP CARTRIDGE TYPE

	DCP (BC) CARTRIDGE TYPE		
	04 KG	06 KG	09 KG
	IS 15683:2018	IS 15683:2018	IS 15683:2018
FIRE RATING	55 B	89 B	144 B
Co2 GAS CARTRIDGE(GMS)	90	120	200
COMPLETE WEIGHT(APPR.KG)	3.9 KG	10.2 KG	14.4 KG
EMPTY WEIGHT(APPR.KG)	7.9 KG	4.2 KG	5.4 KG
OVERALL HEIGHT (M M)	480 M M	505 MM	575 MM
MODEL NO.	ABC4	ABC6	ABC9
OPERATING TEMP. °C	(-)20°C TO(+60°	(-)20°C TO(+60°	(-)20°C TO(+60°
DIA.OF CYLINDER(M M)	140 ±10	160 ±10	175 ± 10
RANGE OF DISCHARGE(M)	2 MTR	2 MTR	2 MTR
DURATION OF DISCHARGE(SEC)	9 SEC	9 SEC	15 SEC
TEST PRESSURE(MIN)	35 kgf/cm <sup>2</sup>	35 kgf/cm <sup>2</sup>	35 kgf/cm <sup>2</sup>
WORKING PRESSURE	15 kgf/cm <sup>2</sup>	15 kgf/cm <sup>2</sup>	15 kgf/cm <sup>2</sup>
BRUST PRESSURE(MIN)	55 kgf/cm <sup>2</sup>	55 kgf/cm <sup>2</sup>	55 kgf/cm <sup>2</sup>
WELDED SECTION NOT TO BREAK AT LESS THAN 80 BAR			
APPROVALS	BIS	BIS	BIS

Mob.: +91 8898181117 / +91 7506657023 / Email.: fireweb07@gmail.com

H.O - E/11, Shree Ganesh CHS, Gautam Nagar, behind Akruiti Centre Point, M.I, D.C, Andheri East, Mumbai, Maharashtra 400093

## MECHANICAL FOAM FIRE EXTINGUISHER SQUEEZE GRIP CARTRIDGE & STORED PRESSURE TYPE

Suitable for 'A' & 'B' classes of fire involving materials like paper, wood, cotton, petroleum products, paint, pigment and varnish

SUITABLE FOR CLASSES OF FIRE:

IS 15683:2018



CML NO: 7700044610



TYPE 'A' FOR  
USE ON PAPER  
WOODEN CLOTH  
ETC



TYPE 'B' FOR  
USE ON PETROL  
OIL, PAINTS, SPIRIT,  
PLASTICS, CHEMICALS  
ETC



### MECHANICAL FOAM FIRE EXTINGUISHER STORED PRESSURE & SQUEEZE GRIP CARTRIDGE TYPE

	A	B
	9 LTR	9 LTR
	IS 15683:2018	IS 15683:2018
FIRE RATING	4A,144B	4A,144 B
COMPLETE WEIGHT(APPR.KG)	14 KG	12.6 KG
EMPTY WEIGHT(APPR.KG)	5 KG	3.6 KG
OVERALL HEIGHT (M M)	570 MM	585 MM
MODEL NO.	ACM-9	ASPM-9
OPERATING TEMP. °C	(+ )5°C TO(+ )60°C	(+ )5°C TO(+ )60°C
DIA.OF CYLINDER(M M)	175 ± 10	175 ± 10
RANGE OF DISCHARGE(M)	2 MTR	2 MTR
DURATION OF DISCHARGE(SEC)	15 SEC	15 SEC
BRUST PRESSURE(MIN)	55 kgf/cm <sup>2</sup>	35 kgf/cm <sup>2</sup>
TEST PRESSURE(MIN)	35 kgf/cm <sup>2</sup>	15 kgf/cm <sup>2</sup>
WORKING PRESSURE	15 kgf/cm <sup>2</sup>	55 kgf/cm <sup>2</sup>
WELDED SECTION NOT TO BREAK AT LESS THAN 80 BAR		
APPROVALS	BIS	
CAUTION:- NOT TO USE ON LIVE ELECTRICAL EQUIPMENT AND WATER SUSEPTIBLE CHEMICALS		

Mob.: +91 8898181117 / +91 7506657023 / Email.: fireweb07@gmail.com

H.O - E/11, Shree Ganesh CHS, Gautam Nagar, behindAkruti Centre Point, M.I, D.C, Andheri East, Mumbai, Maharashtra 400093

## WATER BASED STORED PRESSURE & SQUEEZE GRIP CARTRIDGE TYPE FIRE EXTINGUISHER

Suitable for 'A' classes of fire involving materials like paper, wood, cotton.

IS 15683:2018



CML NO: 7700044610

SUITABLE FOR CLASSES OF FIRE:



TYPE 'A' FOR  
USE ON PAPER  
WOODEN CLOTH  
ETC



### WATER Co2 SQUEEZE GRIP CARTRIDGE & STORE PRESSURE TYPE FIRE EXTINGUISHER

	A	
	9 LTR	9 LTR
	IS 15683:2018	IS 15683:2018
FIRE RATING	3A	3A
COMPLETE WEIGHT(APPR.KG)	13.6 KG	3.5 KG
EMPTY WEIGHT(APPR.KG)	4.6 KG	12.5 KG
OVERALL HEIGHT (M M)	570 MM	585 MM
MODEL NO.	ACW-9	ASPW-9
OPERATING TEMP. °C	(+)-5°C TO(+)-60°C	(+)-5°C TO(+)-60°C
DIA.OF CYLINDER(M M)	175 ± 10	175 ± 10
RANGE OF DISCHARGE(M)	2 MTR	2 MTR
DURATION OF DISCHARGE(SEC)	13 SEC	15 SEC
BRUST PRESSURE(MIN)	55 kgf/cm <sup>2</sup>	35 kgf/cm <sup>2</sup>
TEST PRESSURE(MIN)	35 kgf/cm <sup>2</sup>	15 kgf/cm <sup>2</sup>
WORKING PRESSURE	15 kgf/cm <sup>2</sup>	55 kgf/cm <sup>2</sup>
WELDED SECTION NOT TO BREAK AT LESS THAN 80 BAR		
APPROVALS	BIS	
CAUTION:- NOT TO USE ON LIVE ELECTRICAL EQUIPMENT AND WATER SUSEPTIBLE CHEMICALS		

**Mob.: +91 8898181117 / +91 7506657023 / Email.: fireweb07@gmail.com**

H.O - E/11, Shree Ganesh CHS, Gautam Nagar, behindAkruti Centre Point, M.I, D.C, Andheri East, Mumbai, Maharashtra 400093

## CLEAN AGENT FIRE EXTINGUISHER


Suitable for 'A', 'B', & 'C' classes of fire involving materials like paper, wood, cotton, Petrochemical products, Paints, resins, pigments, Varnish, gases in the compressed form like oxygen, acetylene, LPG & CNG

IS:15683:2018



CML NO: 7700044610

SUITABLE FOR CLASSES OF FIRE:

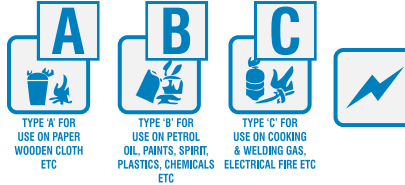

### CLEAN AGENT FIRE EXTINGUISHER

CAPACITY IN KG	2 KG	4 KG	6 KG
I.S. SPECIFICATION NO.	IS 15683:2018	IS 15683:2018	IS 15683:2018
FIRE RATING	(1A,21B)	(2A,34B)	(2A,55 B )
OVERALL HEIGHT (MM)	375 MM	460 MM	480 MM
COMPLETE WEIGHT(APPR.KG)	3.3 KG	6.2 KG	8.6 KG
EMPTY WEIGHT(APPR.KG)	1.3 KG	2.2 KG	2.6 KG
MODEL NO.	ACA2	ACA4	ACA6
OPERATING TEMP. °C	(-20°C TO(+60°	(-20°C TO(+60°	(-20°C TO(+60°
DIA.OF CYLINDER(M M)	108± 10	140±10	160±10
RANGE OF DISCHARGE(M)	2 MTR	2 MTR	2 MTR
DURATION OF DISCHARGE(SEC)	8 SEC	13 SEC	13 SEC
TEST PRESSURE(MIN)	35 kgf/cm <sup>2</sup>	35 kgf/cm <sup>2</sup>	35 kgf/cm <sup>2</sup>
WORKING PRESSURE	15 kgf/cm <sup>2</sup>	15 kgf/cm <sup>2</sup>	15 kgf/cm <sup>2</sup>
BRUST PRESSURE(MIN)	55 kgf/cm <sup>2</sup>	55 kgf/cm <sup>2</sup>	55 kgf/cm <sup>2</sup>
WELDED SECTION NOT TO BREAK AT LESS THAN 80 BAR			
APPROVALS	BIS	BIS	BIS


Mob.: +91 8898181117 / +91 7506657023 / Email.: fireweb07@gmail.com

H.O - E/11, Shree Ganesh CHS, Gautam Nagar, behindAkruti Centre Point, M.I, D.C, Andheri East, Mumbai, Maharashtra 400093

## CLEAN AGENT MODULAR TYPE AUTOMATIC FIRE EXTINGUISHER

An Automatic Detection and Suppression System together in a single unit quite unlike any other system available in the market. Automatic round-the-clock protection. Provides Securities in case of emergencies and powerfailure without power backup.

SUITABLE FOR CLASSES OF FIRE:

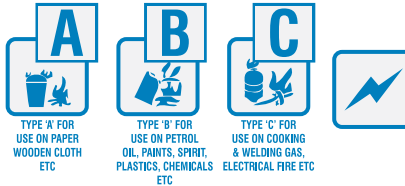

### CLEAN AGENT TYPE MODULAR FIRE EXTINGUISHER

CAPACITY IN KG	02 KG	05 KG	10 KG	15 KG
PROPELLANT	NITROGEN	NITROGEN	NITROGEN	NITROGEN
WORKING PRESSURE	7 TO 15 Kgs/cm <sup>2</sup>	7 TO 15 kgs/cm <sup>2</sup>	7 TO 15 kgs/cm <sup>2</sup>	7 TO 15 kgs/cm <sup>2</sup>
TESTING PRESSURE	35 Kgf/cm <sup>2</sup>	35 Kgf/cm <sup>2</sup>	35 Kgf/cm <sup>2</sup>	35 Kgf/cm <sup>2</sup>
AREA PROTECTION	1 to 1.5m <sup>2</sup>	3 to 4m <sup>2</sup>	5 to 6m <sup>2</sup>	6 to 7m <sup>2</sup>
VOLUME PROTECTION	3m <sup>3</sup>	3m <sup>3</sup>	15m <sup>2</sup>	20m <sup>3</sup>
HANGING VERTICALLY ABOVE RISK	1.5 m	1.5 to 2m	1.7 to 2.25	2 to3
OPERATION TIME IN SECONDS	08-10	10-15	15-20	18-23
CONTENTS	HFC 227 ea/HFC 236 fa			


Mob.: +91 8898181117 / +91 7506657023 / Email.: fireweb07@gmail.com

H.O - E/11, Shree Ganesh CHS, Gautam Nagar, behindAkruti Centre Point, M.I, D.C, Andheri East, Mumbai, Maharashtra 400093

## DRY POWDER ABC MODULAR AUTOMATIC TYPE FIRE EXTINGUISHER

An Automatic Detection and Suppression System together in a single unit quite unlike any other system available in the market. Automatic round-the-clock protection. Provides Securities in case of emergencies and powerfailure without power backup.

### SUITABLE FOR CLASSES OF FIRE:

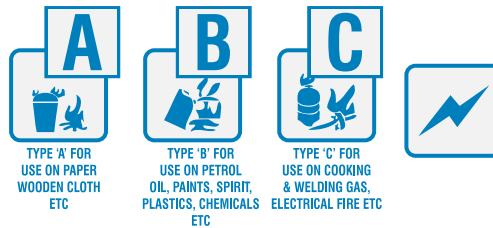

### DRY POWDER ABC MODULAR AUTOMATIC TYPE FIRE EXTINGUISHER

CAPACITY IN KG	02 KG	05 KG	10 KG	15 KG
PROPELLANT	NITROGEN	NITROGEN	NITROGEN	NITROGEN
WORKING PRESSURE	7 TO 15 Kgs/cm <sup>2</sup>	7 TO 15 kgs/cm <sup>2</sup>	7 TO 15 kgs/cm <sup>2</sup>	7 TO 15 kgs/cm <sup>2</sup>
TESTING PRESSURE	35 Kgf/cm <sup>2</sup>	35 Kgf/cm <sup>2</sup>	35 Kgf/cm <sup>2</sup>	35 Kgf/cm <sup>2</sup>
AREA PROTECTION	1 to 1.5m <sup>2</sup>	3 to 4m <sup>2</sup>	5 to 6m <sup>2</sup>	6 to 7m <sup>2</sup>
VOLUME PROTECTION	3m <sup>3</sup>	3m <sup>3</sup>	15m <sup>2</sup>	20m <sup>3</sup>
HANGING VERTICALLY ABOVE RISK	1.5 m	1.5 to 2m	1.7 to 2.25	2 to 3
OPERATION TIME IN SECONDS	8-9	10-15	15-20	18-23
CONTENTS	MONOAMMONIUM PHOSPHATE(MAP)			

Mob.: +91 8898181117 / +91 7506657023 / Email.: fireweb07@gmail.com

H.O - E/11, Shree Ganesh CHS, Gautam Nagar, behindAkruti Centre Point, M.I, D.C, Andheri East, Mumbai, Maharashtra 400093



## CARBON DIOXIDE WHEEL TYPE FIRE EXTINGUISHER

Suitable for 'B' & 'C' class of fire involving materials like petrochemical products, paints, resins, pigment, Varnish, gases in the compressed form like oxygen, acetylene, LPG & CNG

### Suitable for Classes of Fire

IS:15683:2018  
  
 CM/L NO: 7700044610



TYPE 'B' FOR  
USE ON PETROL  
OIL, PAINTS, SPIRIT,  
PLASTICS, CHEMICALS  
ETC



TYPE 'C' FOR  
USE ON COOKING  
& WELDING GAS,  
ELECTRICAL FIRE ETC



### CARBON DIOXIDE FIRE EXTINGUISHER WHEEL TYPE

CAPACITY IN KG	2 KG	3 KG	4.5 KG
I.S. SPECIFICATION NO.	IS 15683:2018	IS 15683:2018	IS 15683:2018
FIRE RATING	21 B	34 B	55 B
OVERALL HEIGHT (MM)	540 MM	540 MM	695 MM
COMPLETE WEIGHT(APPR.KG)	7.9 KG	12.8 KG	15.5 KG
EMPTY WEIGHT(APPR.KG)	5.9 KG	9.8 KG	11 KG
MODEL NO.	ACo2-02	ACo2-3	ACo2-4.5
OPERATING TEMP. °C	(- )20°C TO(+ )60°	(- )20°C TO(+ )60°	(- )20°C TO(+ )60°
DIA.OF CYLINDER(M M)	108	140	140
RANGE OF DISCHARGE(M)	2 MTR	2 MTR	2 MTR
DURATION OF DISCHARGE(SEC .MIN)	8 SECOND	8 SECOND	8 SECOND
TEST PRESSURE(MIN)	250 kgf/cm <sup>2</sup>	250 kgf/cm <sup>2</sup>	250 kgf/cm <sup>2</sup>
WORKING PRESSURE	150 kgf/cm <sup>2</sup>	150 kgf/cm <sup>2</sup>	150 kgf/cm <sup>2</sup>
APPROVALS	BIS	BIS	BIS

Mob.: +91 8898181117 / +91 7506657023 / Email.: fireweb07@gmail.com

H.O - E/11, Shree Ganesh CHS, Gautam Nagar, behindAkruti Centre Point, M.I, D.C, Andheri East, Mumbai, Maharashtra 400093

## CARBON DIOXIDE WHEELED TYPE FIRE EXTINGUISHER

Suitable for 'B' & 'C' class of fire involving materials like petrochemical products, paints, resins, pigment, Varnish, gases in the compressed form like oxygen, acetylene, LPG & CNG

Suitable for Classes of Fire

IS:16018



TYPE 'B' FOR  
USE ON PETROL  
OIL, PAINTS, SPIRIT,  
PLASTICS, CHEMICALS  
ETC



TYPE 'C' FOR  
USE ON COOKING  
& WELDING GAS,  
ELECTRICAL FIRE ETC



### CARBON DIOXIDE FIRE EXTINGUISHER WHEEL TYPE

CAPACITY IN KG	6.5 KG	9 KG	22.5 KG
I.S. SPECIFICATION NO.	IS 16018	IS 16018	IS 16018
FIRE RATING	55 B	55 B	89 B
OVERALL HEIGHT (MM)	970 MM	1210 MM	1025 MM
COMPLETE WEIGHT(APPR.KG)	25.5 KG	32.5 KG	67 KG
EMPTY WEIGHT(APPR.KG)	19 KG	23.5 KG	44.5 KG
OPERATING TEMP. °C	(-)-30°C TO(+)-55°	(-)-30°C TO(+)-55°	(-)-30°C TO(+)-55°
DIA.OF CYLINDER(M M)	140	140	232
RANGE OF DISCHARGE(M)	6 MTR	8 MTR	8 MTR
DURATION OF DISCHARGE(SEC .MIN)	15-20 SECOND	30-35 SECOND	30-60 SECOND
TEST PRESSURE(MIN)	250 kgf/cm <sup>2</sup>	250 kgf/cm <sup>2</sup>	250 kgf/cm <sup>2</sup>
WORKING PRESSURE	150 kgf/cm <sup>2</sup>	150 kgf/cm <sup>2</sup>	150 kgf/cm <sup>2</sup>
CYLINDER	SEAMLESS IS 7285	SEAMLESS IS 7285	SEAMLESS IS 7285
MIN. DISCHARGE %	95%	95%	95%
APPROVALS	BIS	BIS	BIS

Mob.: +91 8898181117 / +91 7506657023 / Email.: fireweb07@gmail.com

H.O - E/11, Shree Ganesh CHS, Gautam Nagar, behindAkruti Centre Point, M.I, D.C, Andheri East, Mumbai, Maharashtra 400093

## MECHANICAL FOAM FIRE EXTINGUISHER

Suitable for 'A' & 'B' classes of fire involving materials like paper, wood, cotton, petroleum products, paint, pigment and varnish

SUITABLE FOR CLASSES OF FIRE:

IS:16018



TYPE 'A' FOR  
USE ON PAPER  
WOODEN CLOTH  
ETC



TYPE 'B' FOR  
USE ON PETROL,  
OIL, PAINTS, SPIRIT,  
PLASTICS, CHEMICALS  
ETC



### MECHANICAL FOAM FIRE EXTINGUISHER

	A B	AB
	45 LTR	150 LTR
	IS 16018	As per is
FIRE RATING	20A-233B	-
COMPLETE WEIGHT(APPR.KG)	76 KG	245 KG
EMPTY WEIGHT(APPR.KG)	31 KG	95 KG
OVERALL HEIGHT (M M)	1010 MM	1110 ± 20MM
MODEL NO.	AMF-45	AMF-150
OPERATING TEMP. °C	(+)5°C TO(+)55°C	(+)5°C TO(+)55°C
DIA.OF CYLINDER(M M)	300 ± 10	600 ± 20
RANGE OF DISCHARGE(M)	10 MTR	15 MTR
DURATION OF DISCHARGE(SEC)	60-180 SEC	180-300 SEC
BRUST PRESSURE(MIN)	55 kgf/cm <sup>2</sup>	55 kgf/cm <sup>2</sup>
TEST PRESSURE(MIN)	35 kgf/cm <sup>2</sup>	35 kgf/cm <sup>2</sup>
Extinguisher Media Expellant	AFFF IS 4948	AFFF IS 4948
WELDED SECTION NOT TO BREAK AT LESS THAN 80 BAR		
APPROVALS	BIS	
CAUTION:- NOT TO USE ON LIVE ELECTRICAL EQUIPMENT AND WATER SUSEPTIBLE CHEMICALS		

Mob.: +91 8898181117 / +91 7506657023 / Email.: fireweb07@gmail.com

H.O - E/11, Shree Ganesh CHS, Gautam Nagar, behindAkruti Centre Point, M.I, D.C, Andheri East, Mumbai, Maharashtra 400093

## WATER BASED FIRE EXTINGUISHER

Suitable for 'A' class of fire involving materials like paper, wood, cotton

SUITABLE FOR CLASSES OF FIRE:

IS:16018



TYPE 'A' FOR  
USE ON PAPER  
WOODEN CLOTH  
ETC



### WATER BASED FIRE EXTINGUISHER

	A	A
	45 LTR	150 LTR
	IS 16018	As per is
<b>FIRE RATING</b>	20A-233B	-
<b>COMPLETE WEIGHT(APPR.KG)</b>	76 KG	245 KG
<b>EMPTY WEIGHT(APPR.KG)</b>	31 KG	95 KG
<b>OVERALL HEIGHT (M M)</b>	1010 MM	1110 ± 20MM
<b>MODEL NO.</b>	AMF-45	AMF-150
<b>OPERATING TEMP. °C</b>	(+)5°C TO(+)55°C	(+)5°C TO(+)55°C
<b>DIA.OF CYLINDER(M M)</b>	300 ± 10	600 ± 20
<b>RANGE OF DISCHARGE(M)</b>	10 MTR	15 MTR
<b>DURATION OF DISCHARGE(SEC)</b>	60-180 SEC	180-300 SEC
<b>BRUST PRESSURE(MIN)</b>	55 kgf/cm <sup>2</sup>	55 kgf/cm <sup>2</sup>
<b>TEST PRESSURE(MIN)</b>	35 kgf/cm <sup>2</sup>	35 kgf/cm <sup>2</sup>
<b>Extinguisher Media Expellant</b>	Co2 Gas Cartridge	Co2 Cylinder
<b>WELDED SECTION NOT TO BREAK AT LESS THAN 80 BAR</b>		
<b>APPROVALS</b>	BIS	
<b>CAUTION:- NOT TO USE ON LIVE ELECTRICAL EQUIPMENT AND WATER SUSEPTIBLE CHEMICALS</b>		


Mob.: +91 8898181117 / +91 7506657023 / Email.: fireweb07@gmail.com

H.O - E/11, Shree Ganesh CHS, Gautam Nagar, behindAkruti Centre Point, M.I, D.C, Andheri East, Mumbai, Maharashtra 400093

## DRY CHEMICAL POWDER BC WHEELED TYPE FIRE EXTINGUISHER

Sodium bicarbonate based dry chemical powder suitable for 'B' & 'C' class of fire involving materials like petrochemical products, paints, resins, pigment, Varnish, gases in the compressed form like oxygen, acetylene, LPG & CNG

SUITABLE FOR CLASSES OF FIRE:



Capacity in (KG)	25 (INSIDE)	25 KG	50 KG	75 KG
I.s. Specification No.	IS 16018	IS 16018	IS 16018	IS 16018
Co2 Gas Cartridge (gms)	500	650	1450	1800
Empty Weight (appr.kg)	24.5kg	31kg	51kg	71.5kg
Complete Weight (appr. Kg)	49.5kg	56kg	101kg	146.5kg
Overall Height (mm)	750	800	1010	1130
Test Pressure (min)	30 Kgf/cm <sup>2</sup>	30 Kgf/cm <sup>2</sup>	30 Kgf/cm <sup>2</sup>	30 Kgf/cm <sup>2</sup>
Min. Discharge %	85%	85%	85%	85%
Dia. Of Cylinder (mm)	300	300	400	400
Range Of Discharge (m) Min.	6	6	8	10
Duration Of Discharge (sec)min.	25	25	40	50
Approvals	BIS	BIS	BIS	BIS
Fire Rating	233B	233B	233B	233B
Operating Temp.°c	-30°C to +55°C	-30°C to +55°C	-30°C to +55°C	-30°C to +55°C

**Mob.: +91 8898181117 / +91 7506657023 / Email.: fireweb07@gmail.com**

H.O - E/11, Shree Ganesh CHS, Gautam Nagar, behind Akruiti Centre Point, M.I, D.C, Andheri East, Mumbai, Maharashtra 400093

### HYDRANT ACCESSORIES

HYDRANT VALVE



DOUBLE HYDRANT VALVE



RRL CANVAS HOSE



MONITOR



### FIRE SPRINKLER / DETECTION SYSTEM

FLEXIBLE ROPE




FIRE ALARM SYSTEM




SPRINKLER



### FIRE SPRINKLER & HYDRANT SYSTEM

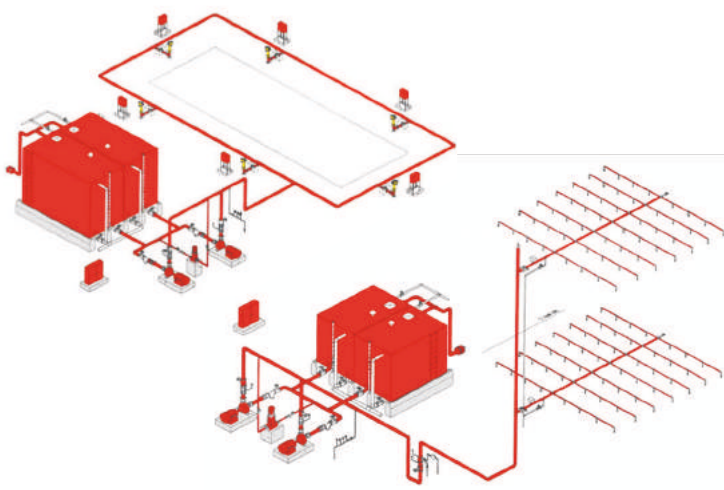

### FIRE SUPPRESSION SYSTEM

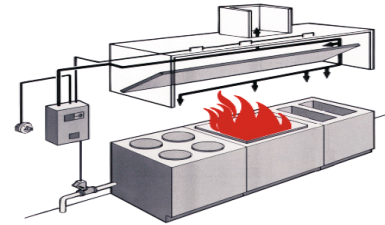

ALARM VALVE



K-Class Fire Extinguisher



Wet Chemical

SIGN AGES FIRE (FIRE SAFETY STICKERS)



HOSE REEL DRUM



D-Class Fire Extinguisher



Type 'D' For Use on Metal Fire



# FIRE AND WEB

Distributors Fire Extinguisher Complete Range of Fire Fighting System & Equipments

Mob.: +91 8898181117 / +91 7506657023 / Email.: fireweb07@gmail.com

H.O - E/11, Shree Ganesh CHS, Gautam Nagar, behind Akruiti Centre Point, M.I, D.C, Andheri East, Mumbai, Maharashtra 400093

G-34 Shiv Shankar Society, Gandhi Nagar, Lalji Pada, New Link Rd, Kandivali West, Mumbai, Maharashtra 400067